


WISTSense Ultra is a high-resolution spectrometer, ideally suited for most FBG sensing applications, offering a unique combination of high resolution, high speed, self calibration, plug and play operation with an integrated light source and dedicated software.

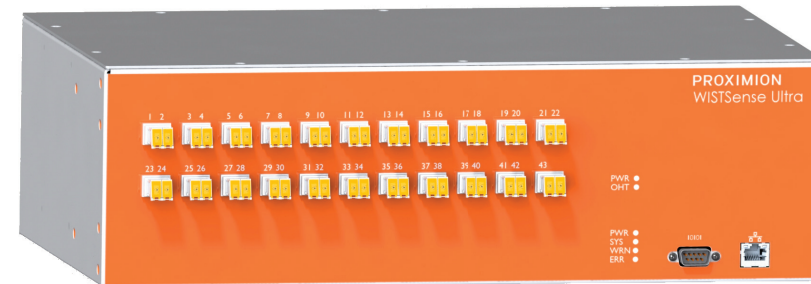

WISTSense Ultra

Proven Reliability

WISTSense Ultra is based on the WISTOM optical engine, originally developed for telecommunication, and consequently complies to the highest quality standard requirements of this industry, NEBS level 3. All WISTSense Ultra interrogators are manufactured in Kista, Sweden at Proximion's ISO9001:2015 certified site.

High Multiplexing Capability

WISTSense Ultra has the capacity to monitor more than 100 sensors per channel and with upto 43 channels in a single interrogator, more than 5000 sensors per device.

Fast Scanning Speed and High Resolution

WISTSense Ultra can scan across the full spectrum in less than 40 microseconds which enables rapid full spectrum data acquisition for dynamic measurements.

Key Features

- Capacity of +5,000 sensors
- Fast scan of optical spectrum
- Robust assembly with no moving parts
- Customization alternatives
- Highly adaptable SW platform

Applications

- Energy
- Industrial Automation
- Oil and Gas
- Aerospace and Defence
- Biomedical and Healthcare

Optical performance	WISTSense Ultra
Optical wavelength range	1520 - 1580 nm
Max no. of sensors	5504
Number of channels	13, 28 or 43
Measurement frequency	12000 Hz
Measurement time (13 channels)	0.11 s
Wavelength accuracy	1 pm

Interface and software	WISTSense Ultra
Communication interface	Ethernet
Optical interface	SC/APC or LC/APC
Software	WISTHeat Monitor

Physical properties	WISTSense Ultra
Dimensions	420 x 235 x 128 mm
Operating temperature	0 to 50 °C
Power requirements	90 - 240 VAC