



Laser vibrometers

Optical measurement solutions for vibration Product brochure





Single point vibrometers







- Resolve sub-pm vibration and velocities up to 30 m/s
- Configurable front-end from DC to 24 MHz
- Choose from sensor heads (compact design, fiber-optics, with HD+ camera) and patented QTec® technology for best SNR on technical surfaces





- Compact sensor head with remote controller for frequencies from DC up to 3 MHz
- Integrated camera for visually monitoring the sample (optional)



Polytec has been providing light in the darkness for more than 50 years. With nearly 500 employees worldwide, the company develops, produces, and distributes optical measurement systems for research and industry. The products enjoy an outstanding reputation in the international professional world.

The company manufactures a range of laser vibrometers that have become the accepted gold standard for non-contact vibration measurement.

The laser Doppler vibrometer is a precision optical sensor used for determining vibration velocity and displacement at a fixed point. The technology is based on the Doppler effect, sensing the frequency shift of back scattered light from a moving surface.

Whether the application is for 100% Q.A. inspection of motors or bearings on a production line, optimizing of ultrasonic tools, confirming the characteristics of MEMS resonators and other microstructures or identifying torsional modes in a vehicle's drive-train and many more, there is a Polytec system that can provide the measurement solution.





IVS Industrial Vibration Sensor

- Robust and wear-free sensor for vibro-acoustic quality inspection in-line up to 100 kHz
- Clear pass/fail decisions for production testing based on reliable vibration measurement
- Best signal quality and flexible working distances with auto and remote focus





VibroGo®

- Truly portable, compact laser sensor enabling non-contact vibration analysis
- On-board data analysis for condition monitoring, research and vibration measurement in the field
- Extended frequency range up to 320 kHz, 30 m large stand-off distance and up to 6 m/s velocities



Full-field vibrometers






PSV Scanning Vibrometer 1D & 3D

- For comprehensive, full-field analysis for NVH, acoustics, structural dynamics, ultrasonics and FEM validation up to 25 MHz
- PSV Software package provides detailed vibration data analysis and 3D animation of deflection shapes with full export compatibility
- Available as compact notebook-based model, 1D or 3D rack type and as fully automated structural test station RoboVib®
- Patented QTec® multi-path interferometry for 10x faster measurements and best SNR on technical surfaces
- Powerful accessories like the geometry scan unit for direct detection of geometry data or the optical derotator enabling measurements on rotating parts



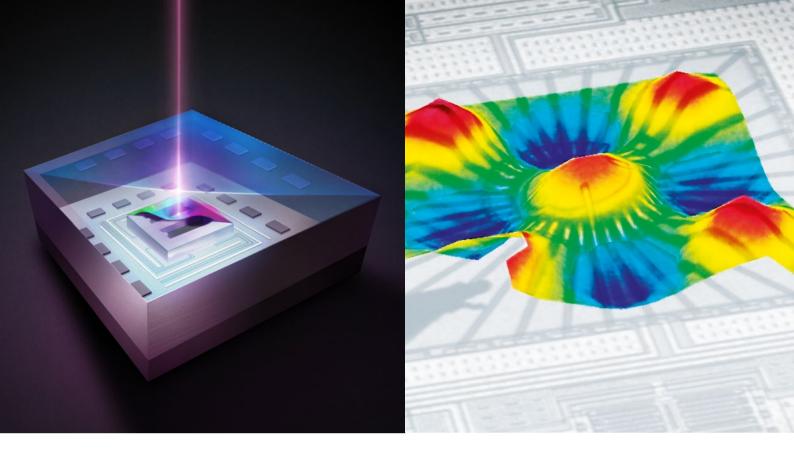

Microscope-based vibrometers



MSA Micro System Analyzer

- Microscope-based vibrometers for a reactionless characterization of microsystems, MEMS, BAW/SAW, biological probes, etc.
- From intuitive entry-level to combined vibration and topography measurement systems, as 3D dynamics analyzer or ultra-high frequency workstation with up to 6 GHz bandwidth
- For measuring dynamics, securing microsystems functionality, modal analysis or FE model updating
- Integrated microscope optics for highest lateral resolution and image quality
- Patented MSA IRIS technology measuring capped MEMS through Si-encapsulation









Special application vibrometers



RLV Rotational Laser Vibrometer

- For torsional vibration and rotational speed variation measurement, e.g. automotive engine and drivetrain torque, motors and pumps, etc.
- Provides angular velocity, displacement and rpm outputs



VibroFlex Range

- Remote vibration analysis > 300 m with laser precision
- Remote access to distant and hazardous areas
- Patented coaxial HD camera for precise targeting



IPV In-Plane Vibrometer

- Transverse (in-plane) vibration measurement
- Lateral examination of stroke movements



Differential vibrometers

- Optical subtraction of ambient vibrations
- Specially suited for microsystems and material science (e.g. piezoelectric materials)
- High-speed (up to 40 m/s) and multi-channel measurements of valve train dynamics











Software, accessories and service



Powerful software

Use meaningful data visualization and animated deflection shapes, build complete measurement solutions featuring post-processing, enabling order analysis, EMA and OMA for FEM validation



Data transparency

Analog & digital interfaces for easy sharing of insights via additional tools, open interfaces enabling automation and scripting for custom applications (Python, MatLab, LabView, C++, etc.)



Accessories and options

Customized configurations using special optics, stands, positioning stages, beam deflection and much more



PolyXpert Service

Contact us for free demonstrations, feasibility studies, onsite support or outsourcing to our fully equipped (automated) laboratories







Shaping the future since 1967

High tech for research and industry. Pioneers. Innovators. Perfectionists.

Find your Polytec representative: www.polytec.com/contact

Polytec GmbH · Germany Polytec-Platz 1-7 · 76337 Waldbronn